

\Orchestrating a brighter world

NEC

Outstanding high-quality LCD projector
with good usability and high efficiency

ME382UG / ME342UG / ME372WG / ME402XG / MC382WG /
MC332WG / MC422XG / MC372XG / MC342XG / MC302XG



MultiPresenter

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE

Excellent-quality WUXGA* high resolution images from a compact LCD projector with easy operation for education and corporate use

* ME382UG / ME342UG

LCD Type Projector with WUXGA* High Resolution and 4K Input Support

* ME382UG / ME342UG

High Resolution and High Quality Picture of WUXGA* (1920x1200)

* ME382UG / ME342UG

This projector series realize the high resolution display – up to 4K compatible, WUXGA (ME382UG / ME342UG), WXGA (ME372WG / MC382WG / MC332WG) & XGA (ME402XG / MC422XG / MC372XG / MC342XG / MC302XG) native resolution. And these projectors achieve high contrast of 16,000 : 1**.

** with Iris

Support for 4K Input

This is the first NEC projector in the 3,000 – 4,000 lumens class to support 4K at 30 Hz signal input (Supports HDMI 1 and HDMI 2) for the future-proof input management.

Promotes Ecology and Reduces TCO by 10,000 Hours' Long-lasting Lamp, etc.

Long-lasting Lamp, which Delivers up to 10,000 Hours

The product can be operated at low cost because the light source can be used for a long time of 10,000 hours* without requiring replacement. (up to 15,000 hours* with ECO MODE [ECO]). This provides high reliability for education (aimed mainly at K-12) and corporate usage.

* Refer to the specifications

Low Power Consumption in Standby Condition with Energy Saving Technology

Selecting [NORMAL] for [STANDBY MODE] from the menu can put the projector in power-saving mode that consumes only 0.18 W (100 – 130 V AC) / 0.26 W (200 – 240 V AC).

[ECO MODE] for Low Power Consumption and Quiet Noise Level

This projector is equipped with a [ECO MODE] to reduce power consumption during use. Furthermore, when the [ECO MODE] is on, the power-saving effect is converted into the amount of reduction of CO₂ emissions, and this amount is listed in the confirmation message displayed when the power is turned off and under [INFO.] on the on-screen menu ([Carbon Meter]). This projector designed for a quiet noise level of 29 dB (in Eco MODE [ECO]) to prevent annoying operation noises.

Advanced Networking Capabilities

Easily Connect with Smart Devices by Installing the MultiPresenter Receiver Function

This projector is compatible with the NEC MultiPresenter application, so multi-screen projection is possible via the network (wired LAN / wireless LAN). The design of the menu of the "Intelligent connection" operation screen is improved, and the customer can change the wall-paper of stand-by screen. The customer can set various settings of network function on this menu.


Multi-screen Projection Function*1

The multi-screen projection function allows for the sharing of screens of multiple devices on various split-screen displays via a wireless or wired LAN. Display information from up to 50² PCs, tablet PCs, smart phones, and other network connected devices on a multi-screen display of up to 16 screens. Easily share screens and information regardless of device or operating system.

Intelligent connecting view



Network setting menu



*1: Requires the optional wireless LAN module for wireless connection. PCs, Smart phones and tablets require the download and installation of our MultiPresenter software.

*2: The connection of 50 devices to the network requires construction of a wireless LAN environment, such as the use of a separate access point.

MultiPresenter



Network Control

• NaViSet Administrator 2
NaViSet Administrator2 helps you control the projector by a computer via wired LAN connection.




- CRESTRON ROOMVIEW with emergency function
- PC control
- Alert mail
- AMX BEACON
- PJLink
- HTTP server (projector adjustment)

Multiple Input Terminals for Dual HDMI and LAN Control Support

Wide Range of Input Terminals (HDMI × 2, etc.)

The projector is equipped with a variety of input terminals: HDMI (× 2), computer (analogue), video, etc.

Terminals

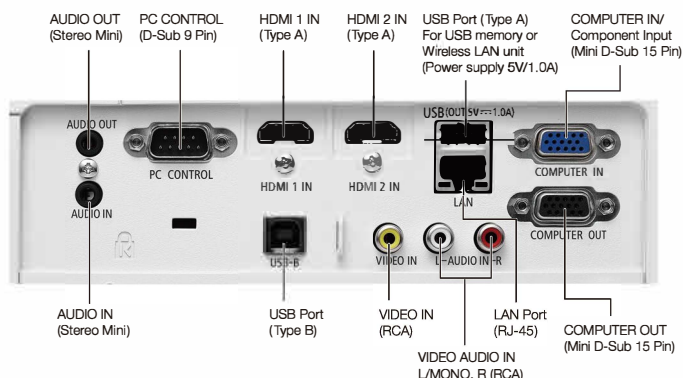

Dual HDMI Inputs


Among this projector's wide selection of inputs are dual HDMI with HDCP for connecting to high-definition sources such as Blu-ray players, cable boxes, satellite receivers and personal computers. The HDMI input also supports audio signals.

Wired / Wireless LAN Control Support

Thanks to the integrated LAN port (RJ-45), you can connect the projector to a wired LAN and control it from a computer. Control can also be carried out via wireless LAN by installing the optional wireless LAN unit (NP05LM series) to this projector.

USB Power Supply of 1.0 A

1.0 A USB current can be provided for third-party dongles such as the wireless one not to plug into an outlet.



Various Functions and Features

Wide × 1.7* Optical Zoom Lens

* ME372WG / ME402XG

The projector series has a variety of optical zoom ratio models, such as zoom ratio of × 1.7 (ME372WG / ME402XG), × 1.6 (ME382UG / ME342UG) and × 1.2 (other models). These can cover a wide projection distance and you can set up at various locations.

Quick Start, Quick Power Off and Direct Power Off

The projector can be put away immediately after the projector is powered down. No cool down period is required after the projector is turned off from the remote control or cabinet control panel. The projector has a feature called "Direct Power Off". This feature allows the projector to be turned off (even when projecting an image) by disconnecting the AC power supply. To turn off the AC power supply when the projector is powered on, use a power strip equipped with a switch and a breaker.

Seamless Switch Function for Smoother Screen Changes when Switching the Signal

When the input source is switched, the image displayed before switching is held so that the new image can be switched to without a break due to absence of a signal.

16 W Built-in Speaker

The powerful 16 watt speaker provides the volume need for class rooms and meeting rooms.

AUTO POWER ON and AUTO POWER OFF Features

The DIRECT POWER ON, AUTO POWER ON (COMP), AUTO POWER OFF, and OFF TIMER features eliminate the need to always use the POWER button on the remote control or projector cabinet.

Other Useful Functions and Features

- Includes a remote with the control ID registration function, which allows operation of multiple projectors with a single remote
- Security bar / Kensington lock / Control panel lock and password lock
- Virtual Remote Tool
- USB display

- [VIEWER] function to project still images saved on USB memory
- Keystone correction
+/- 30 degree Horizontal / Vertical keystone, Auto keystone, Cornerstone, Pincushion correction supported
- DICOM simulation
- Wall colour correction

ME382UG

3,800 lumens WUXGA 3.5kg

ME342UG

3,400 lumens WUXGA 3.5kg

ME372WG

3,700 lumens WXGA 3.2kg

ME402XG

4,000 lumens XGA 3.2kg

MC382WG

3,800 lumens WXGA 3.1kg

ME332WG

3,300 lumens WXGA 3.1kg

MC422XG

4,200 lumens XGA 3.1kg

MC372XG

3,700 lumens XGA 3.1kg

MC342XG

3,400 lumens XGA 3.1kg

MC302XG

3,000 lumens XGA 3.1kg



Specifications

Model name		NP-ME382UG	NP-ME342UG	NP-ME372WG	NP-ME402XG	NP-MC382WG	NP-MC332WG	NP-MC422XG	NP-MC373XG	NP-MC342XG	NP-MC302XG
Method		Three primary colour liquid crystal shutter projection									
Specifications of main parts											
Liquid crystal panel	Size	0.64 inch LCD with MLA × 3 (aspect ratio: 16 : 10)			0.63 inch LCD with MLA × 3 (aspect ratio: 4 : 3)	0.64 inch LCD with MLA × 3 (aspect ratio: 16 : 10)	0.59 inch LCD with MLA × 3 (aspect ratio: 16 : 10)	0.63 inch LCD with MLA × 3 (aspect ratio: 4:3)		0.63 inch LCD × 3 (aspect ratio 4 : 3)	
	Pixels ^{*1}	2,304,000 (1,920 dots × 1,200 lines)	1,024,000 (1,280 dots × 800 lines)	786,432 (1,024 dots × 768 lines)	1,024,000 (1,280 dots × 800 lines)	786,432 (1,024 dots × 768 lines)					
Projection lenses	Zoom	1.6			1.7	1.2					
	Focus					Manual					
	Zoom ratio					Manual					
	Throw ratio	1.2 ~ 2.0			1.2 ~ 2.1	1.3 ~ 2.2	1.4 ~ 1.6	1.5 ~ 1.8			
	F-number / focal length	F = 1.5 to 2.1 / f = 17.2 ~ 27.7 mm			F = 1.7 to 2.2 / f = 17.4 ~ 29.0 mm		F = 1.6 to 1.8 / f = 19.2 ~ 23.0 mm		F 2.1 to 2.3 / f = 19.1 ~ 22.9 mm		
Lamp wattage ^{*2}		225 W					210 W		225 W		
Lamp life ^{*3}	ECO MODE OFF						10,000 H				
	ECO MODE NORMAL						12,000 H				
	ECO MODE ECO						15,000 H				
Light output ^{*4*5}	ECO MODE OFF	3,800 lm	3,400 lm	3,700 lm	4,000 lm	3,800 lm	3,300 lm	4,200 lm	3,700 lm	3,400 lm	3,000 lm
	ECO MODE NORMAL	Approx. 80%							Approx. 86%		Approx. 80%
	ECO MODE ECO	Approx. 67%							Approx. 72%		Approx. 67%
Contrast ratio ^{*6} (all white/all black)											
16,000 : 1 with Iris											
Image Size (Performance guarantee range)											
30 to 300 inches (40 to 200 inches)											
Colour Reproduction											
10-bit signal processing, 1.07 billion colours											
Quietness (ECO mode OFF / Normal / ECO)											
37 dB / 34 dB / 29 dB											
Synchronization range											
15 to 100 KHz (RGB: 24 kHz or over)											
Max. display resolution (horizontal × vertical)											
Up to 4K@30 Hz (3,840 × 2,160) with Advanced AccuBlend, Pixel clock frequency: less than 300 MHz											
Keystone Correction											
Manual, Approx. ± 30 Max degrees											
Manual, Approx. ± 30 Max degrees											
Input/output connectors											
Computer/ Component	Video input	Mini D-Sub 15-pin × 1									
	Video output	Mini D-Sub 15-pin × 1									
	Audio input	Stereo mini jack × 1									
	Audio output	Stereo mini jack × 1									
HDMI	Video input	Type A HDMI connector × 2									
	Audio input	Yes									
Video	Input	RCA × 1									
	Audio input	RCA × 2 (L/R)									
PC control connector											
D-Sub 9-pin × 1 (4,800 / 9,600 / 19,200 / 38,400 bps)											
USB port											
USB type A × 1 for USB Memory or Wireless LAN (5.0 V / 1.0 A power supply), USB type B for USB display × 1											
Wired LAN											
RJ-45 × 1 (100Base-TX / 10Base-T)											
Wireless LAN Port (Optional)											
USB type A × 1											
Built-in speaker											
16 W × 1											
Usage environment											
Operating temperature: 5 to 40°C ^{*6} , Operating humidity: 20 to 80% (with no condensation)											
Storage temperature: -10 to 50°C, Storage humidity: 20 to 80% (with no condensation)											
Operating altitude: 0 to 3,000 m (1,700 to 3,000 m: Set [FAN MODE] to [HIGH ALTITUDE])											
Power supply											
100 ~ 240 V AC, 50/60 Hz											
Power consumption	ECO MODE OFF	295 W (100 ~ 130 V) / 283 W (200 ~ 240 V)			288 W (100 ~ 130 V) / 277 W (200 ~ 240 V)			287 W (100 ~ 130 V) / 259 W (200 ~ 240 V)		288 W (100 ~ 130 V) / 277 W (200 ~ 240 V)	
	ECO MODE NORMAL	238 W (100 ~ 130 V) / 232 W (200 ~ 240 V)			229 W (100 ~ 130 V) / 223 W (200 ~ 240 V)			228 W (100 ~ 130 V) / 223 W (200 ~ 240 V)		229 W (100 ~ 130 V) / 223 W (200 ~ 240 V)	
	ECO MODE ECO	207 W (100 ~ 130 V) / 202 W (200 ~ 240 V)			196 W (100 ~ 130 V) / 192 W (200 ~ 240 V)			196 W (100 ~ 130 V) / 191 W (200 ~ 240 V)		196 W (100 ~ 130 V) / 192 W (200 ~ 240 V)	
	STANDBY (NETWORK STANDBY)	1.5 W (100 ~ 130 V) / 1.6 W (200 ~ 240 V)									
	STANDBY (NORMAL) ^{*7}	0.18 W (100 ~ 130 V) / 0.26 W (200 ~ 240 V)									
Rated input current		3.4 A ~ 1.4 A					3.3 A ~ 1.3 A				
Dimensions (W × H × D)		345 × 104.6 × 261 mm (Net dimensions, not including protruding parts), 450 × 200 × 390 mm (Gross dimensions)									
Weight		3.5 kg (Net weight), 5.0 kg (Gross weight, with box)			3.2 kg (Net weight), 4.7 kg (Gross weight, with box)			3.1 kg (Net weight), 4.6 kg (Gross weight, with box)			

*1: Effective pixels are more than 99.99 %.

*2: Wattage when ECO mode is OFF.

*3: Time at which the light source is at half brightness; not the warranty period of product. Sometimes repair /parts replacement timing may come earlier than this.

*4: This is the light output value (lumens) when the [ECO MODE] is set to [OFF] and [PRESET] is set to [HIGH-BRIGHT].

If any other mode is selected as the [PRESET] mode, the light output value may drop slightly.

*5: Compliance with ISO21118-2012

*6: Eco mode selected automatically at 35°C to 40°C.

*7: Internal measured value. All wired network ports are connected and active.

• These specifications and the product's design are subject to change without notice.

Remote control



(included accessory)

Options


Replacement lamp
NP47LPWireless LAN unit
NP05LM1-5*

Allows you to transmit data wirelessly over your network when you insert it into the USB (Wireless LAN) port.


*The last digit may vary depending on the country of destination.

Cabinet dimensions


ME382UG / ME342UG



ME372WG / ME402XG / MC382WG / MC332WG / MC422XG / MC372XG / MC342XG / MC302XG




Throw Distance and Screen Size

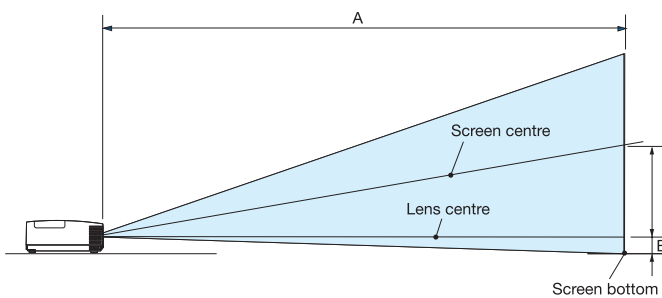

A = Throw distance

B = Vertical distance between lens centre and screen bottom
(top of screen for ceiling application)

NOTE: The values in the tables are design values and may vary.



MultiPresenter, Virtual Remote, NaViSet and CARBON METER are trademarks or registered trademarks of NEC Display Solutions, Ltd. in Japan and other countries.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

CRESTRON and CRESTRON ROOMVIEW are trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and other countries. PLink is a trademark applied for trademark right in Japan, the United States of America and other countries and areas.

Blu-ray is a trademark of the Blu-ray Disc Association. AMX is a trademark or registered trademark of AMX LLC in the United States and other countries. Android is a trademark of Google LLC.

Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries. OS X is a registered trademark of Apple, Inc. registered in the United States and other countries.

iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

All other brand or product names are trademarks or registered trademarks of their respective holders.

The images in this brochure are samples.

All specifications are subject to change without notice. January 2019

©2019 NEC Display Solutions, Ltd.

NEC Display Solutions, Ltd.

4-28, Mita 1-chome, Minato-ku, Tokyo 108-0073, Japan

<http://www.nec-display.com/ap/>

Cat.No. WLPJ-1812-0012NF

